






DESCRIPTION

The PL/X DC motor controller uses closed loop control of armature current and feedback voltage to give precise control of motor torque and speed. The unit also controls the motor excitation field. The closed loop parameters are programmable by the user and a wealth of inputs and outputs are provided to allow very complex motion control processes to be achieved.

PRODUCT NAME

PL/X5-50

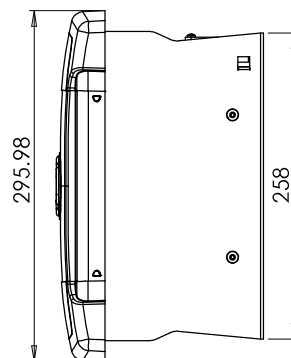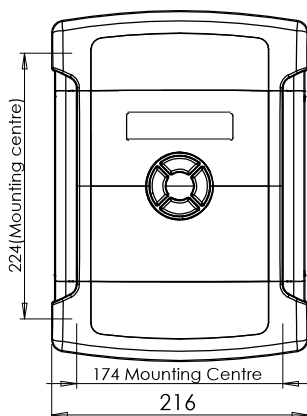

RATINGS & DIMENSIONS

PL 2 QUADRANT PLX 4 QUADRANT	KW @ 460v	HP @ 460v	ARMATURE CURRENT DC AMPS	FIELD AMPS
PL and PLX 5	5	6.6	12	8
PL and PLX 10	10	13.3	24	8
PL and PLX 15	15	20	36	8
PL and PLX 20	20	26.6	51	8
PL and PLX 30	30	40	72	8
PL and PLX 40	40	53.3	99	8
PL and PLX 50	50	66.6	123	8

FRAME SIZE

H	296 mm
W	216 mm
D	175 mm

SHIPPING WEIGHT

8kg