


Event technology MIDNIGHT-SERIES

Socket outlet safety Austrian/German system




	• STANDARD •	
	16 Amp	
Poles	2P + E	
Flange a [mm]	50	
Fixing center b [mm]	38	
c [mm]	62	
d [mm]	25	
e [mm]	18	
f [mm]	24	
g [mm]	43	
h [mm]	4,2	
Wire flexible [mm ²]	1- 2x2,5	
Wire solid [mm ²]	1- 2x2,5	
Contact screws [Ncm]	80	
Weight [g]	45	

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP54 splashproof

Socket outlet safety Austrian/German system with sealing bulge



	• STANDARD •	
	16 Amp	
Poles	2P + E	
Flange a [mm]	50	
Fixing center b [mm]	38	
c [mm]	62	
d [mm]	25	
e [mm]	22	
f [mm]	24	
g [mm]	43	
h [mm]	4,2	
Wire flexible [mm ²]	1- 2x2,5	
Wire solid [mm ²]	1- 2x2,5	
Contact screws [Ncm]	80	
Weight [g]	45	


- with sealing bulge
- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts

IP54 splashproof

only IPX4

* Plugs and socket outlets for portable use are subject to the standard DIN VDE 0620-1:2010 and ÖVE/ÖNORM E 8684-2-2:2010

Socket outlet safety French/Belgian system




	• STANDARD •	
	16 Amp	
Poles	2P + E	
Flange a [mm]	50	
Fixing center b [mm]	38	
c [mm]	62	
d [mm]	25	
e [mm]	18	
f [mm]	24	
g [mm]	43	
h [mm]	4,2	
Wire flexible [mm ²]	1- 2x2,5	
Wire solid [mm ²]	1- 2x2,5	
Contact screws [Ncm]	80	
Weight [g]	45	

- with screw terminals
- housing material: PA6
- contacts: nickel-plated contacts
- with shutter

IP54 splashproof

Socket outlet safety British system

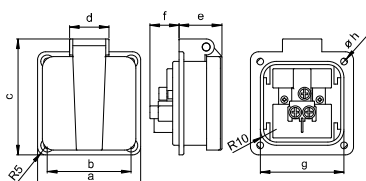

	13 Amp	13 Amp
Poles	2P + E	2P + E
Flange a [mm]	64	50
Fixing center b [mm]	52	38
c [mm]	72	54
d [mm]	25	25
e [mm]	26,5	18
f [mm]	18	22
g [mm]	52	35
h [mm]	4,2	4,5
Weight [g]	67	50

- with screw terminals
- housing material: PA6
- side connection

IP54 splashproof

250V~

50/60Hz

Amp.	Poles	pack. unit	Abbreviations/Types	Cat.No.
16	3	100	<p>P-NOVA PLUS+</p> <p>Flange: 50x50mm, Fixing center: 38x38mm</p>	1050-0ss
16	3	100	<p>P-NOVA PLUS+</p> <p>Flange: 50x50mm, Fixing center: 38x38mm</p>	1050-0ssw
16	3	100	<p>P-NOVA PLUS+</p> <p>Flange: 50x50mm, Fixing center: 38x38mm without shutter</p>	1040-0s
16	3	100	<p>P-NOVA PLUS+</p> <p>Flansch: 50x50mm, Lochabstand: 38x38mm incl. shutter</p>	1040-0sc
13	3	100	<p>Flange: 64x64mm, Fixing center: 52x52mm</p>	1020-0s
13	3	100	<p>Flange: 50x50mm, Fixing center: 38x38mm</p>	1020-5s

