


| | |
|------------------------|---|
| article# | 292-12v |
| article description | CEE-connector 32A 2p 42VAC 50/60Hz IP44 TWIST |
| description long | CEE-connector 32A 2p 42VAC 50/60Hz IP44 TWIST housing material: PA6 rated current: 32A number of poles: 2 (2P) clock-position: 12h rated voltage/frequency: 42V~ / 50+60Hz contacts: brass nickel plated connection technology: screw terminals IP protection class: IP44 |
| GTIN (EAN) | 9003399061240 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.177 kg |
| packaging quantity | 10 |
| minimum order quantity | 10 |

| | |
|---------------------------------|--------------------------|
| ETIM 9.0 | EC001320 |
| IEC-amperage | 32 A |
| Number of poles | 2 |
| Voltage according to EN 60309-2 | 40-50 V (50+60 Hz) white |
| Clock hour position | 12 h |
| Identification colour | White |
| Degree of protection (IP) | IP44 |
| Connection system | Screwed terminal |
| Angle of plug | Straight |
| Cable entry | Gland nut |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Nickel-plated |

| | |
|------------------------|----------------------|
| a | 150 mm |
| b | 75 mm |
| K (cable Ø) | 9,5-24 mm |
| SW | 48 mm |
| wire flexible | 1-10 mm ² |
| contact screws | 160 Ncm |
| strain relief | 600 Ncm |
| dismantling length | 70 mm |
| stripping length | 14-16 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

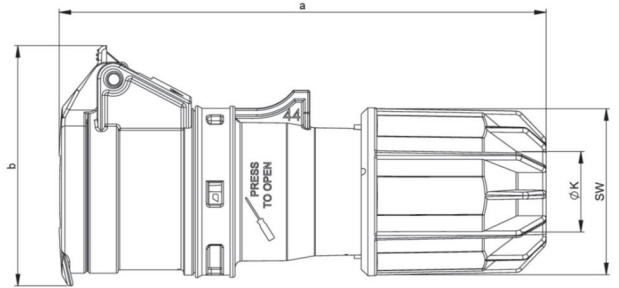

<https://www.pcelectric.at/shop/en/?func=detail&artnr=292-12v>