


| | |
|------------------------|--|
| article# | 77725-6tt |
| article description | CEE-flanged plug angled 32A 5p 6h IP44 TT |
| description long | CEE-flanged plug angled 32A 5p 6h IP44 TT housing material: PC/ABS rated current: 32A number of poles: 5 (3P+N+PE) clock-position: 6h rated voltage/frequency: 200/346V~ - 240/415V~/50+60Hz contacts: brass connection technology: screwless terminals (TT) IP protection class: IP44 |
| GTIN (EAN) | 9003399729300 |
| country of origin | AT |
| customs number | 85366990 |
| net weight | 0.256 kg |
| packaging quantity | 5 |
| minimum order quantity | 5 |

| | |
|---------------------------------|----------------------|
| ETIM 9.0 | EC001319 |
| IEC-amperage | 32 A |
| Voltage according to EN 60309-2 | 400 V (50+60 Hz) red |
| Number of poles | 5 |
| Clock hour position | 6 h |
| Identification colour | Red |
| Degree of protection (IP) | IP44 |
| Connection system | Screw less terminal |
| Construction type | Built-up device plug |
| Angle of plug | Angled |
| Material | Plastic |
| Contact material | CuZn |
| Surface treatment contacts | Untreated |

| | |
|------------------------|------------------------|
| a | 90 mm |
| b | 100 mm |
| c | 77 mm |
| d | 85 mm |
| e | 164 mm |
| f | 103 mm |
| g | 5 mm |
| wire flexible | 2,5-6 mm ² |
| wire solid | 2,5-10 mm ² |
| dismantling length | 50 mm |
| stripping length | 12-14 mm |
| ambient temperature | -25 – 40 °C |
| temperature resistance | -25 – 80 °C |

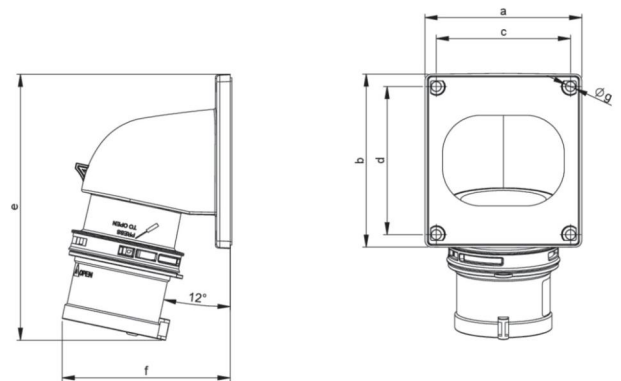

<https://www.pcelectric.at/shop/en/?func=detail&artnr=77725-6tt>

