

1. Safety single phase transformers

SINGLE PHASE > PC1600

POLYLUX



Features

Dry type transformer

IP-20 enclosure:

Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA

Metallic box painted with epoxy polyester resin from 3150 VA

Safety class I, convertible in class II up to 2500 VA

Includes LED functioning indicator

Full power capacity in every connection


Voltage selection through metallic bridges (included)

Optional protection fuse

Possibility of tailor-made manufacturing

Technical Characteristics

| | |
|---------------------|---|
| Rating | 1600 VA |
| Input voltage | 230/400/460 V |
| Output voltage | 24/48 V |
| Frequency | 50/60 Hz |
| Protection degree | IP-20 |
| Cooling | ANAN |
| Ambient temperature | 30°C |
| Temperature rise | Class B |
| Insulation | Class B - 130°C |
| Windings | Class HC - 220°C |
| Test voltage | 4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth |
| Standards | IEC/EN/UNE-EN 61558, CE |
| Mounting | Screws |
| Weight | 20,8 kg |
| Dimensions | 214x225x284x195x175 mm 7Ø |

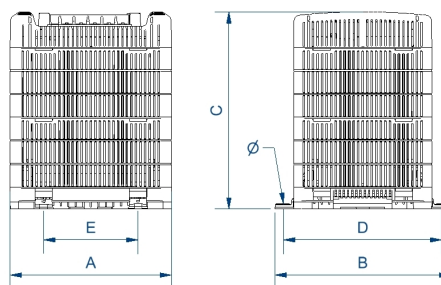

+ Info www.polylux.com

Productos equivalentes