

1. Single phase isolating transformers

P | Q | IP FAMILY > QD2500



Features

Dry type cast resin transformer

Advantages of resin technology:

Protection against corrosive environments

Protection against high vibration levels

Protection against electrodynamic efforts

Reduction of noise level

Increase of product's lifespan

IP-20 enclosure:

Last generation V-0 fireproof polymer box according to UL94 up to 2500 VA

Polyester resin from 1250 VA

Safety class I, convertible in class II up to 1000 VA

Includes LED functioning indicator

Full power capacity in every connection

Voltage selection through metallic bridges (included)

Possibility of tailor-made manufacturing

Technical Characteristics

| | |
|---------------------|---|
| Rating | 2500 VA |
| Input voltage | 230/400/460 V |
| Output voltage | 115/230 V |
| Frequency | 50/60 Hz |
| Protection degree | IP-20 |
| Cooling | AN |
| Ambient temperature | 40°C |
| Temperature rise | Class B |
| Insulation | Class B - 130°C |
| Windings | Class HC - 220°C |
| Test voltage | 4,6 kV (1 min, 50 Hz) pri-sec - 3,2 kV (1 min, 50 Hz) pri-earth - 2,5 kV (1 min, 50 Hz) sec-earth |
| Standards | IEC/EN/UNE-EN 61558, CE |
| Mounting | Screws |
| Weight | 38,5 kg |
| Dimensions | 233x241x314x219x175 mm 7Ø |


Applications

The transformers P, Q and N are especially designed to adapt voltages in applications of maneuver and control in both domestic and industrial as well as in electrical cabinets.

Another important application is the galvanic isolation of facilities for safety reasons, as well as the generation of neutrals referenced to earth.

Thanks to the resin, the Q Series transformers are the optimal solution for areas with a temperature elevated environment and humid areas with high degrees of corrosion and dust.

Areas with high levels of vibrations.

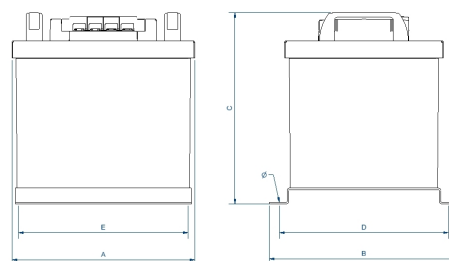

+ Info www.polylux.com

Productos equivalentes