

Universal support with Ω FLAT

Made of:

- PVC support rail in 2-meter bars
- L-shaped anchoring block with adjustable spacing between phases
- T-shaped anchoring block with minimum allowed spacing between phases

ADVANTAGES



- for flexible insulated bar cross-sections starting from 2x24x1 to 10x120x1
- support completely made of insulating material
- PVC rail easy to cut at the desired length
- quick fitting to the panel board structure by means of hex socket head cap screws M6
- high resistance to short-circuits

See Ω FLAT technical features on page 44

Simple support with spacer


APPLICATIONS and ADVANTAGES

- For use with insulated flexible bars up to 32x10x1.
- Possibility to fit up to 4 flexible bars.
- Fits easily to the panel board structure by means of screw (not included) inserted at the base of the spacer.
- Accurate and ordered fitting inside the panel board.
- Excellent heat dissipation thanks to the spacing between bars

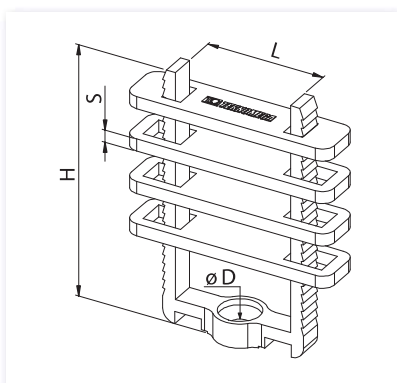

In Polyamide 6/6 reinforced with 30% fiberglass
Self-extinguishing UL 94-V0
Black colour

SPACER AND OVERLAPPING SUPPORT

| Code | Reference |  | Sect. max Ω Flex | H (mm) | L (mm) | S (mm) | Ø D (mm) |
|---------|-----------|---|-------------------------|--------|--------|--------|----------|
| DZP3000 | DZP BFX32 | 10 | 32 x 10 x 1 | 83 | 38 | 4 | 7 |