

EGO20


Door- or wall-mount air conditioners

COOLING CAPACITY


2000 W



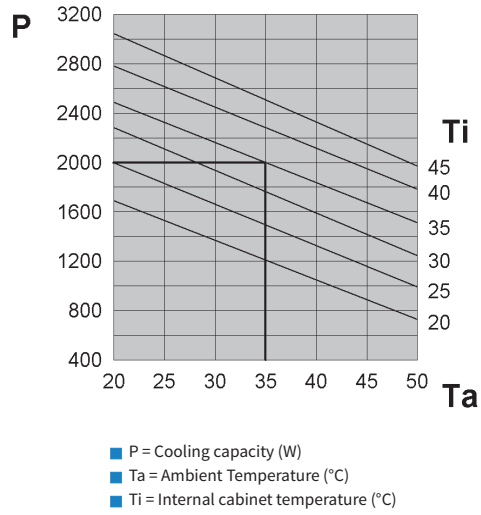

Performance

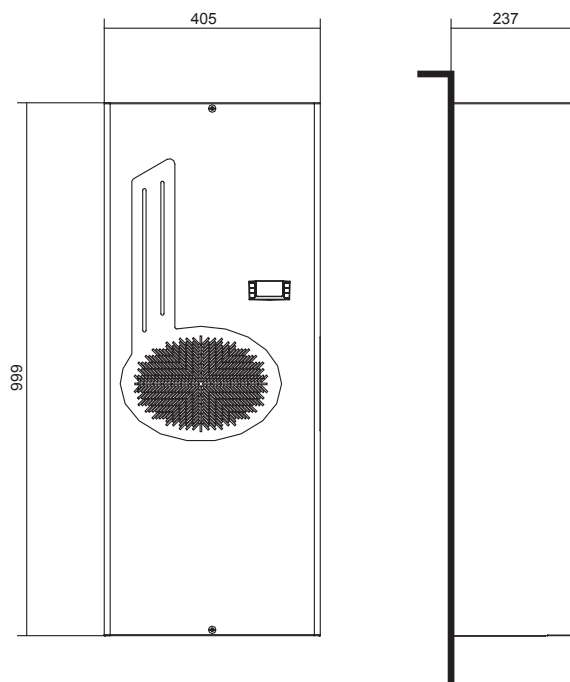

Dimensions



Features	UoM	EGO20BT1B	EGO20BTVBX0000	EGO20CT1B	EGO20LT1B	EGO20NTVBX0000
Cooling capacity EN14511 - A35A35	W	2000	2000	2000	2000	2000
Cooling capacity EN14511 - A35A50	W	1510	1510	1510	1510	1510
Power supply	V - Hz	230 1~ 50-60	230 1~ 50-60	115 1~50-60	400 3~ 50-60	460 3~ 60
Width	mm	405	405	405	405	405
Height	mm	999	999	999	999	999
Depth	mm	237	237	237	237	237
Max current	A	6.5	7	13.3	2.5	2.7
Inrush current	A	24	24	48	10	14
T Fuse	A	10	10	20	6	5
Power draw EN14511 - A35A35	W	1080	1100	1070	970	1220
Power draw EN14511 -A35A50	W	1290	1300	1210	1150	1440
Operating cycle	-	100%	100%	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.43	0.54	0.43	0.45	0.61
Max refrigeration circuit pressure	bar	25	28	25	25	28
External air fan capacity	m ³ /h	1050	1050	1050	1050	1050
Cabinet air fan capacity	m ³ /h	860	860	860	860	860
Internal temperature range	°C	20-50	20-50	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat factory set to 35°C				
External temperature range	°C	20-55*	20-50	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34	IP34	IP34
Noise level	dB (A)	65	65	65	65	65
Weight	kg	52	52	54	54	54
Colour	-	RAL 7035 embossed effect				
Conformity	-	CE	CE 	CE	CE	CE 

* 50 °C at 60 Hz

Accessories	
Pack of 5 fabric air filters	C15000163
Pack of 1 metal air filter	C15000164
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	