

EGO40

Door- or wall-mount air conditioners

COOLING CAPACITY

3850 W




Features	UoM	EGO40BT1B	EGO40LT1B	EGO40NTVBX0000
Cooling capacity EN14511 - A35A35	W	3850	3850	3850
Cooling capacity EN14511 - A35A50	W	2870	2870	2870
Power supply	V ~ Hz	230 1~ 50-60	400 3~ 50-60	460 3~ 60
Width	mm	500	500	500
Height	mm	1270	1270	1270
Depth	mm	336	336	336
Max current	A	9.5	3.6	4.2
Inrush current	A	35.2	18	18
T Fuse	A	16	8	8
Power draw EN14511 - A35A35	W	1710	1780	2040
Power draw EN14511 -A35A50	W	1990	2050	2350
Operating cycle	-	100%	100%	100%
Electrical connection	-	4-pin plug	4-pin plug	4-pin plug
R134a Refrigerant	kg	0.69	0.69	1.14
Max refrigeration circuit pressure	bar	25	25	28
External air fan capacity	m ³ /h	1450	1450	1450
Cabinet air fan capacity	m ³ /h	1450	1450	1450
Internal temperature range	°C	20-50	20-50	20-50
Temperature regulation	-	Electronic thermostat, factory set to 35°C		
External temperature range	°C	20-50	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP55	IP55	IP55
EN60529 ingress protection - ambient side	-	IP34	IP34	IP34
Noise level	dB (A)	70	70	70
Weight	kg	82	85	85
Colour	-	RAL 7035 embossed effect		
Conformity	-	CE	CE	CE cULus

Accessories

Pack of 5 fabric air filters	C15000183
Pack of 1 metal air filter	C15000185
Version "0", semi-recessed installation	
External stainless-steel framework	
Coating in non-standard colour	

Performance

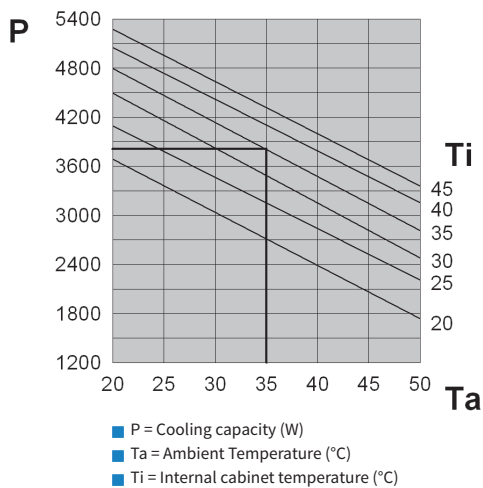

Dimensions

