

# EGO80

Door- or wall-mount air conditioners

## COOLING CAPACITY

7600 - 7950 W




Features	UoM	EGO80MTEB	EGO80NTEB
Cooling capacity EN14511 - A35A35	W	7600	7950
Cooling capacity EN14511 - A35A50	W	5700	5930
Power supply	V ~ Hz	400 3~ 50	460 3~ 60
Width	mm	800	800
Height	mm	2000	2000
Depth	mm	387	387
Max current	A	8.1	9.3
Inrush current	A	30.7	32.5
T Fuse	A	16	16
Power draw EN14511 - A35A35	W	3300	4035
Power draw EN14511 - A35A50	W	4910	5845
Operating cycle	-	100%	100%
Electrical connection	-	Cable L = 3 m	Cable L = 3 m
R134a Refrigerant	kg	2.8	2.8
Max refrigeration circuit pressure	bar	27	27
External air fan capacity	m <sup>3</sup> /h	2900	2900
Cabinet air fan capacity	m <sup>3</sup> /h	2900	2900
Internal temperature range	°C	20-46	20-46
Temperature regulation	-	Electronic thermostat, factory set to 35°C	
External temperature range	°C	20-50	20-50
EN60529 ingress protection - cabinet side	-	IP54	IP54
EN60529 ingress protection - ambient side	-	IP34	IP34
Noise level	dB (A)	75	75
Weight	kg	160	160
Colour	-	RAL 7035 embossed effect	
Conformity	-	CE	CE

### Accessories

Pack of 5 fabric air filters	C15000188
Pack of 1 metal air filter	C15000189
External stainless-steel framework	
Coating in non-standard colour	

## Performance (EGO80MTEB)

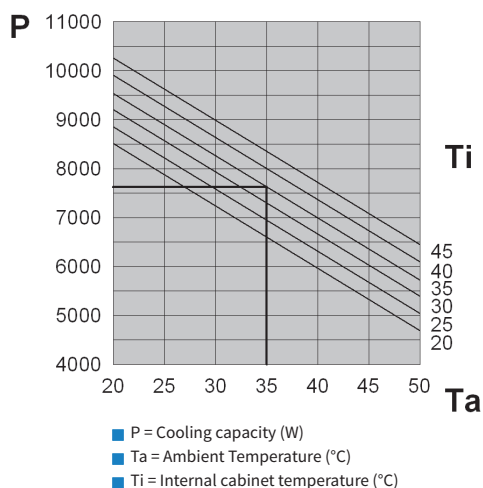

## Dimensions

